





NOZZLE BURNER TIPS

FOR EVENLY DISBURSED HEATING OF NOZZLES





Q-8001

1 PIECE




Q-8002

2 PIECE
W/CERAMIC SCREEN

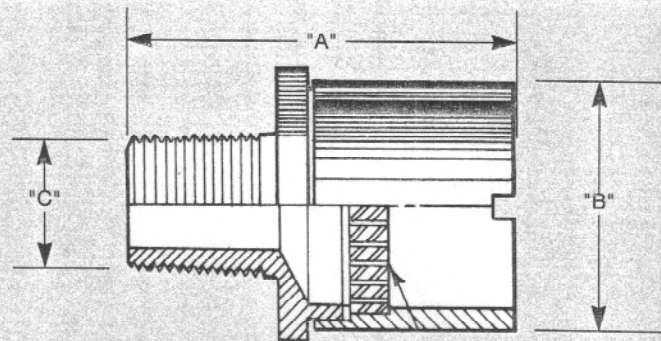

Q-8003

2 PIECE
W/CERAMIC SCREEN



SPECIFICATIONS

Part No.	"A" Dim.	"B" Dim.	Thread
Q-8001	1-3/8"	1-5/16"	3/4" NPT
Q-8002	1-13/16"	1-1/8"	3/8" NPT
Q-8003	2-11/32"	1-7/16"	1/2" NPT

For soft evenly disbursed flame heating of critical areas of goosenecks, nozzles, noses. It is recommended that burner tips be distributed approximately 3-3 1/2" apart to insure good even distribution of the heat. This will help insure the extended life of (nozzles, noses) and avoid hot spots and overheating often caused by the use of large burners or torches.

Product Information Sheet

DY-KAST SUPPLY

1382 LEAR INDUSTRIAL PARK
AVON, OH 44011

PH: 440-937-7979 FAX: 440-937-7999

www.DYKAST.com sales@dykast.com

DY-KAST

SUPPLY AND EQUIPMENT CO.

26192 Center Ridge Road, Westlake, Ohio 44145-0617